



RECOMMENDED P.C.B. THICKNESS 1.60±0.14
PCB LAYOUT FOR TRANSITION FIT WITH PCB PEGS
 HEADER VERSIONS 90814-0**/-2**/-8**/-9**,
 VIEWED FROM COMPONENT SIDE

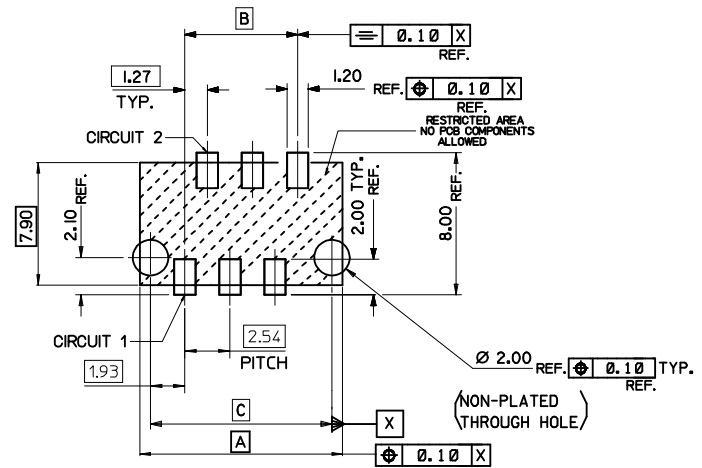

RECOMMENDED P.C.B. THICKNESS 1.60±0.14
PCB LAYOUT FOR CLEARANCE FIT WITH PCB PEGS
 HEADER VERSIONS 90814-0**/-2**/-8**/-9**,
 VIEWED FROM COMPONENT SIDE

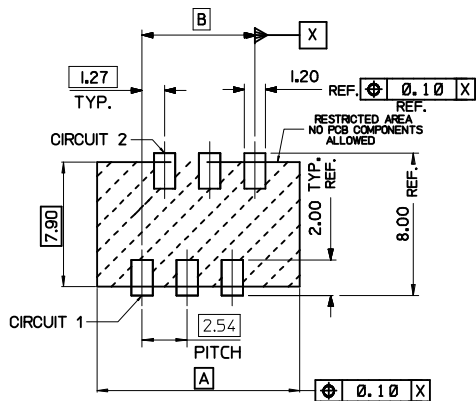

PCB LAYOUT FOR HEADERS WITHOUT PCB PEGS
 HEADER VERSIONS 90814-3**/-5**/-6**/-7**,
 VIEWED FROM COMPONENT SIDE

| | | | | |
|------------|----------------|---------|---------|---------|
| 90814-0026 | 26 | 36.80 | 31.75 | 35.60 |
| 90814-0024 | 24 | 34.26 | 29.21 | 33.06 |
| 90814-0022 | 22 | 31.72 | 26.67 | 30.52 |
| 90814-0020 | 20 | 29.18 | 24.13 | 27.98 |
| 90814-0018 | 18 | 26.64 | 21.59 | 25.44 |
| 90814-0016 | 16 | 24.10 | 19.05 | 22.90 |
| 90814-0014 | 14 | 21.56 | 16.51 | 20.36 |
| 90814-0012 | 12 | 19.02 | 13.97 | 17.82 |
| 90814-0010 | 10 | 16.48 | 11.43 | 15.28 |
| 90814-0008 | 8 | 13.94 | 8.89 | 12.74 |
| 90814-0006 | 6 | 11.40 | 6.35 | 10.20 |
| 90814-0004 | 4 | 8.86 | 3.81 | 7.66 |
| PART NO. | NUMBER OF CKTS | DIMN. A | DIMN. B | DIMN. C |

| | | | | | | |
|---|--|--|--|------------------------------|---------------------------|---------------------------|
| CORRECTED P.C.B. DIMS EC NO: IFC2013-0901 DRAWN:BBYRNES 2012/12/13 CHKD:DMAHER 2013/01/22 APPR:STGRIFLIN 2013/01/23 | QUALITY SYMBOLS ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE MM ONLY | SCALE 5:1 | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | DESCRIPTION | 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.2 ± --- ANGULAR ± 1/2° | mm INCH DRAWN BY DATE DMCNAMAR 2001/08/23 CHECKED BY DATE BMAGUIRE 2001/08/23 APPROVED BY DATE EFOLAN 2010/11/04 | TITLE PICOFLEX SMT HEADER | MATERIAL NO. SEE CHART | DOCUMENT NO. SDA-90814 |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | SIZE A 2 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | |